




Axial-Rollsystem RS16 FL Axial rolling system RS16 FL

Bauart stillstehend
Type stationary

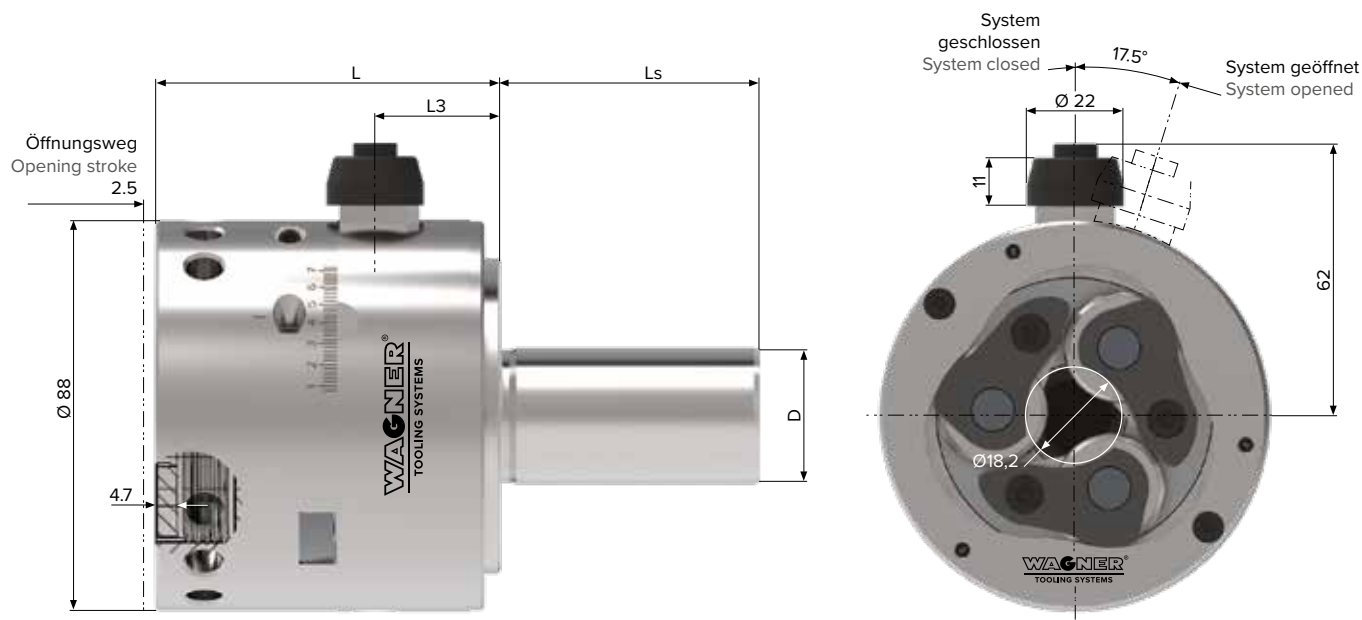


Axial-Rollsystem RS16 FL / Axial rolling system RS16 FL

Gewicht (gesamt)/Weight (total) 2.7 kg

	mm Ø	Zoll/Inch
Arbeitsbereich Ø/Working range Ø:		
- Regelgewinde/Standard thread	3–16	0.118–0.63
- Feingewinde/Fine thread	3–24	0.118–0.945
Max. Steigung/Pitch max.	2	11t.p.i.

Schaft-Ø D mm (Zoll) Shank-Ø D mm (Inch)	d mm	L mm	L _s mm	L ₁ mm	L ₂ mm	L ₃ mm
19.05 (3/4")	12.5	75	42	68.8	105	25.5
20	12.5	75	42	68.8	105	25.5
22	12.5	75	42	68.8	105	25.5
25	16.5	75	48	68.8	∞	25.5
30	16.5	75	55	68.8	∞	25.5
32	16.5	75	80	68.8	∞	25.5
25.4 (1")	16.5	75	48	68.8	∞	25.5
VDI20	16.5	87.5	40	68.8	119.8	38
VDI25	14.2	83.8	48	75.8	122.8	34.3
VDI30	16.5	90.8	55	–	136.8	41.3
VDI40	16.5	90.8	63	–	138.8	41.3

Abbildung: Schaftmaße, siehe Tabelle

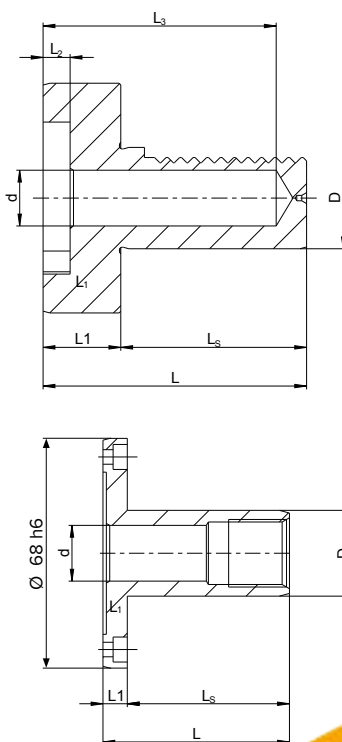

ROLLENHALTERTABELLE AUF SEITE 352
ROLL HOLDER TABLE PAGE 352

HINWEIS: Weitere Schäfte auf Anfrage
(z.B. HSK und Capto)

NOTE: Other shafts on request
(e.g. HSK and Capto)